

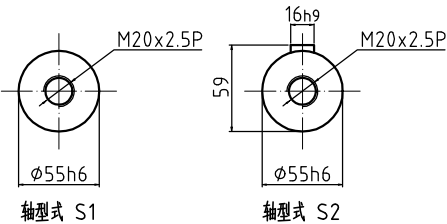
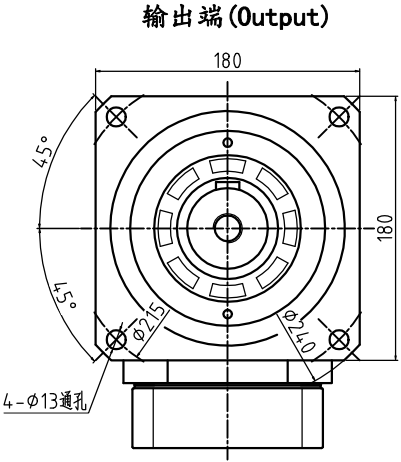


AVD180D-L2-S2-P2-φ24-φ110-φ145-M8-72

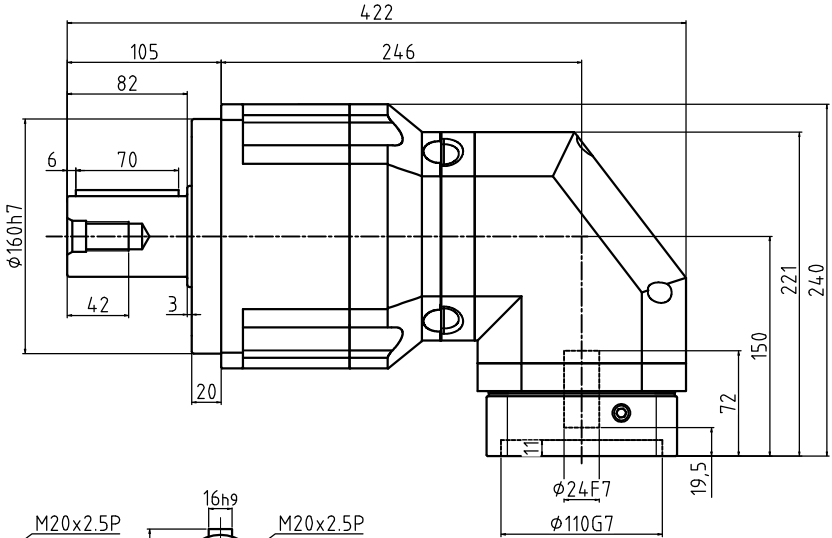

减速比	12	15	20(L2)	25	30	35	40	50	60	70	80	100	120	140	160	200				
额定输出扭矩(Nm)	588	588	1050	1200	588	1200	1050	1200	1100	1200	1050	1200	1100	1100	1000	900				
最大输出扭矩(Nm)	1176	1176	2100	2400	1176	2400	2100	2400	2200	2400	2100	2400	2200	2200	2000	1800				
转动惯量(Kg.cm ²)	23.4	23.4	23.4	23.4	23.4	23.4	23.4	21.8	23.4	21.8	21.8	21.8	21.8	21.8	21.8	21.8				
容许径向力F _{2rB} ²	14500 N		传动效率		≈90%				重 量		≈54Kg									
容许轴向力F _{2a1B} ²	6200 N		噪音值		≤72dB				扭 转 刚 性		145 Nm/arcmin									
容许轴向力F _{2a2B} ²	7250 N		使用温度		-10℃~+90℃				请 注 意:		1.所有数据(PDF.CAD.3D)变更时,我们不做通知。 2.具体速比的额定扭矩请参照我司样本“减速机性能资料”; “用户的实际负载扭矩”×“使用系数”≤减速机的额定扭矩; 否则用户发生故障,我司概不负责;使用系数请参照我司样本P05。						标 记		处 数	
额定输入转速	3000 rpm		润滑方式		合成润滑油(终身润滑)															
最大输入转速	6000 rpm		安装方向		任意															
超精密背隙P0	≤4 arcmin		防护等级		IP65															
精密背隙P1	≤7 arcmin		使用寿命		20000h(连续运转减半)															
标准背隙P2	≤9 arcmin		入力法兰: FAB14 2D-φ110×4 3×M8																	
																	</			

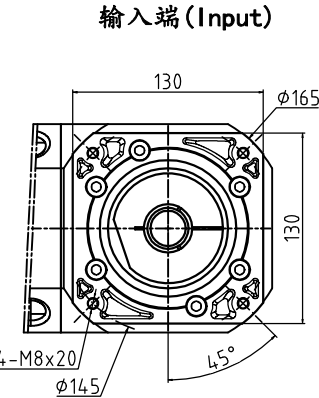

精密行星齿轮减速机

180D-L2 (双级)